

Nod to Nature

Luxury Vinyl Tile

A mindfully crafted collection that is inspired by the wondrous beauty found in nature. With **Nod to Nature** every design comes in three distinct structures:

- **Rewilding**, Dry Back Traditional LVT
- **Individuality**, Loose Lay Thick LVT
- **Visionary**, SPC Rigid Core

Never again will you have to sacrifice style to accommodate the installation.






Nod to Nature - Rewilding

2.5 mm 20 mil Luxury Vinyl Flooring

Product Information

Construction: Dry Back Traditional Vinyl Tile (Luxury Vinyl Tile/LVT)
Sizes: 7" x 48", 9" x 60", 12" x 24", 16" x 32"
Overall Thickness: 2.5 mm (0.100")
Finish: HartGuard™ ultrashield with Cleantivity™ antimicrobial technology
Installation: Glue-down application
Maintenance: No waxing, buffing, sealers or finishes required.
 Floor should be swept regularly to remove excess dirt and grit.

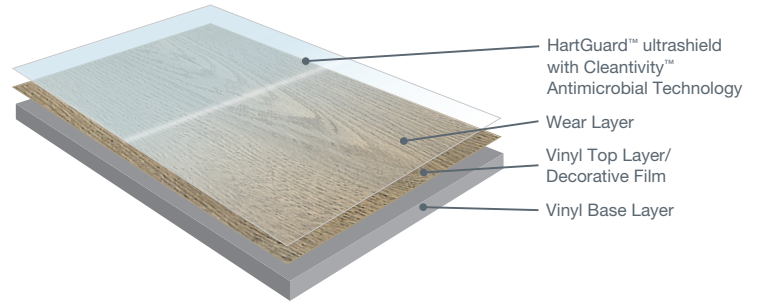

Testing

| Attribute | Test Protocol | Requirement | Performance |
|-------------------------------------|--------------------------|---|-------------|
| Thickness | ASTM F386 | Average 0.082" (2.08 mm) | Passed |
| Wear Layer Thickness | ASTM F410 | 0.020" (0.5 mm) minimum for Commercial Use | Passed |
| Residual Indentation | ASTM F1914 | ≤ 0.012" (0.31 mm) | Passed |
| Chemical Resistance | ASTM F925 | No more than slight change in surface dulling, attack or staining | Passed |
| Resistance to Heat | ASTM F1514 | ΔE < 8 avg., max | Passed |
| Resistance to Light | ASTM F1515 | ΔE < 8 avg., max | Passed |
| Static Load Resistance @ 250 | ASTM F970 | ≤ 0.005" | Passed |
| Fire Test Data – Flame Spread | ASTM E648 | 0.45 W/cm ² or more Class 1 | Passed |
| Fire Test Data – Smoke Evolution | ASTM E662 | 450 or less | Passed |
| ADA Standards for Accessible Design | Chapter 3, Section 302.1 | Floor surfaces shall be stable, firm and slip resistant | Passed |
| Static Coefficient of Friction** | ASTM D2047/UL 410 | ≥ 0.5 | Passed |

Sustainability

| WELL v1 Feature | Contribution |
|-----------------|--|
| Air | Feature 04 - VOC Reduction Tested and third party certified by FloorScore as complying with CDPH v1.2 |
| Well Being | Feature 97 - Material Transparency Readily available Health Product Declaration (HPD) to 1000 ppm |
| | Feature 88 (Part 2) Biophilia I - Qualitative Products available that incorporate nature patterns |
| | Feature 99 - Beauty and Design II Patterns and colors to aid in wayfinding and spatial familiarity (Part 3) |

Limited Warranty

15-Year Commercial Warranty when installed in strict accordance with the detailed instructions.






Nod to Nature - Individuality

5.0 mm 20 mil Luxury Vinyl Flooring

Product Information

Construction: Loose Lay Thick Vinyl Tile (Luxury Vinyl)
Sizes: 7" x 48", 9" x 60", 12" x 24", 16" x 32"
Overall Thickness: 5.0 mm (0.196")
Finish: HartGuard™ ultrashield with Cleantivity™ antimicrobial technology
Installation: Loose Lay Thick Vinyl Tile (Luxury Vinyl)
Maintenance: No waxing, buffing, sealers or finishes required.
 Floor should be swept regularly to remove excess dirt and grit.

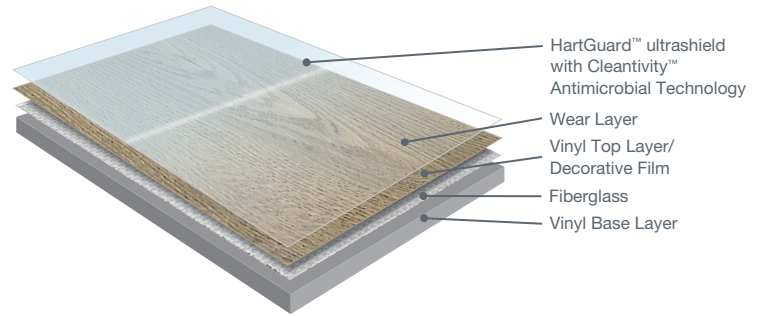

Testing

| Attribute | Test Protocol | Requirement | Performance |
|-------------------------------------|--------------------------|---|-------------|
| Thickness | ASTM F386 | Average 0.082" (2.08 mm) | Passed |
| Wear Layer Thickness | ASTM F410 | 0.020" (0.5 mm) minimum for Commercial Use | Passed |
| Residual Indentation | ASTM F1914 | ≤ 0.012" (0.31 mm) | Passed |
| Chemical Resistance | ASTM F925 | No more than slight change in surface dulling, attack or staining | Passed |
| Resistance to Heat | ASTM F1514 | ΔE < 8 avg., max | Passed |
| Resistance to Light | ASTM F1515 | ΔE < 8 avg., max | Passed |
| Static Load Resistance @ 250 | ASTM F970 | ≤ 0.005" | Passed |
| Fire Test Data – Flame Spread | ASTM E648 | 0.45 W/cm ² or more Class 1 | Passed |
| Fire Test Data – Smoke Evolution | ASTM E662 | 450 or less | Passed |
| ADA Standards for Accessible Design | Chapter 3, Section 302.1 | Floor surfaces shall be stable, firm and slip resistant | Passed |
| Static Coefficient of Friction** | ASTM D2047/UL 410 | ≥ 0.5 | Passed |

Sustainability

| WELL v1 Feature | Contribution |
|-----------------|--|
| Air | Feature 04 - VOC Reduction Tested and third party certified by FloorScore as complying with CDPH v1.2 |
| Well Being | Feature 97 - Material Transparency Readily available Health Product Declaration (HPD) to 1000 ppm |
| | Feature 88 (Part 2) Biophilia I - Qualitative Products available that incorporate nature patterns |
| | Feature 99 - Beauty and Design II Patterns and colors to aid in wayfinding and spatial familiarity (Part 3) |

Limited Warranty

15-Year Commercial Warranty when installed in strict accordance with the detailed instructions.




Scan to learn more



Nod to Nature - Visionary 5.2 mm 20 mil Rigid Core Flooring

Product Information

Construction: SPC Rigid Core Vinyl Tile (Luxury Vinyl)
Sizes: 7.08" x 47.64", 8.66" x 59.45", 12" x 24", 16" x 32"
Overall Thickness: 5.2 mm (0.204")
Finish: HartGuard™ ultrashield with Cleantivity™ antimicrobial technology
Installation: Locking/floating application
Maintenance: No waxing, buffing, sealers or finishes required.
 Floor should be swept regularly to remove excess dirt and grit.

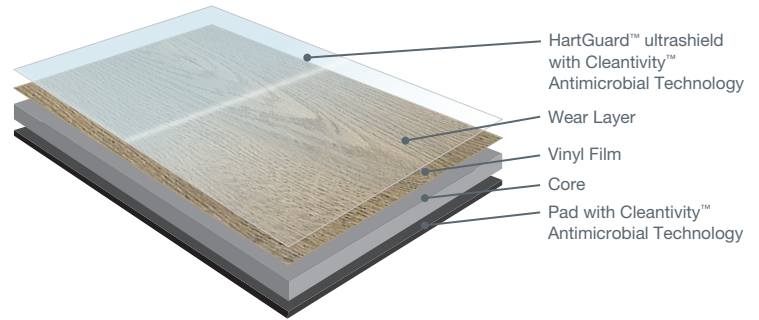

Testing

| Attribute | Test Protocol | Requirement | Performance |
|-------------------------------------|--------------------------|---|-------------|
| Thickness | ASTM F386 | Average 0.082" (2.08 mm) | Passed |
| Wear Layer Thickness | ASTM F410 | 0.020" (0.5 mm) minimum for Commercial Use | Passed |
| Residual Indentation | ASTM F1914 | ≤ 0.012" (0.31 mm) | Passed |
| Chemical Resistance | ASTM F925 | No more than slight change in surface dulling, attack or staining | Passed |
| Resistance to Heat | ASTM F1514 | ΔE < 8 avg., max | Passed |
| Resistance to Light | ASTM F1515 | ΔE < 8 avg., max | Passed |
| Static Load Resistance @ 250 | ASTM F970 | ≤ 0.005" | Passed |
| Fire Test Data – Flame Spread | ASTM E648 | 0.45 W/cm ² or more Class 1 | Passed |
| Fire Test Data – Smoke Evolution | ASTM E662 | 450 or less | Passed |
| ADA Standards for Accessible Design | Chapter 3, Section 302.1 | Floor surfaces shall be stable, firm and slip resistant | Passed |
| Static Coefficient of Friction** | ASTM D2047/UL 410 | ≥ 0.5 | Passed |

Sustainability

| WELL v1 Feature | Contribution |
|-----------------|--|
| Air | Feature 04 - VOC Reduction Tested and third party certified by FloorScore as complying with CDPH v1.2 |
| Well Being | Feature 97 - Material Transparency Readily available Health Product Declaration (HPD) to 1000 ppm |
| | Feature 88 (Part 2) Biophilia I - Qualitative Products available that incorporate nature patterns |
| | Feature 99 - Beauty and Design II Patterns and colors to aid in wayfinding and spatial familiarity (Part 3) |

Limited Warranty

15-Year Commercial Warranty when installed in strict accordance with the detailed instructions.

