

Durability Done Different



Distributor of Protect-All® Flooring



Protect-All Interlocking Tiles offer an instant flooring solution for temporary or permanent flooring applications - and most of the same great benefits of a permanent Protect-All floor. Quick and easy to install, these $18^{\prime\prime} \times 18^{\prime\prime}$ interlocking tiles are suitable for indoor and outdoor use. Their interlocking tabs hold them together, eliminating the need for adhesives or special installation equipment.

Characteristics

- Excellent traction: wet or dry
- Resistant to common fats, acids, and greases
- Resistant to stains, odors, and fluids
- Shock absorbing and impact-resistant
- Available in matte and gloss finishes

Testing Data


	TEST METHOD	UNITS	RESULT
Dynamic Coefficient of Friction	ANSI A326.3		.56
Coefficient of Friction	ASTM D-695	Dry	.88
Compressive Strength	ASTM D-751	psi	641
Bacteria and Mildew Resistance	ASTM G-21		Pass



Applications

Home gyms
Garages
Machine shops
Storage rooms
Cashier stations
Fitness centers
Grooming areas
Maintenance rooms
Weight rooms

Colors

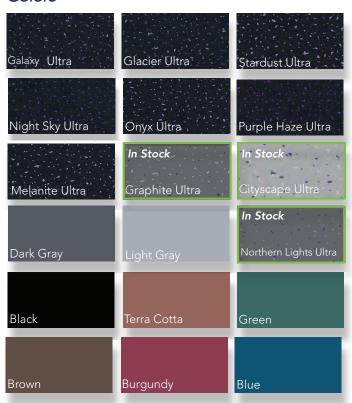



Scan to learn more